CHANGE: RADAR FREQ.; EDITORIAL

AIRAC AMDT 250 / 7 OCT 2021

Austro Control GmbH

LOWI AD 2 MAP 13-1-1

INSTRUMENT APPROACH CHART - ICAO

VAR 4° E

AD ELEV 1907 FT
THR 26 ELEV 1894 FT
HGT RELATED TO THR ELEV

RADAR
TOWER 128.975
ATIS 120.100
126.030

INNSBRUCK
ÖSTERREICH AUSTRIA
LOC/DME PROCEDURE WEST

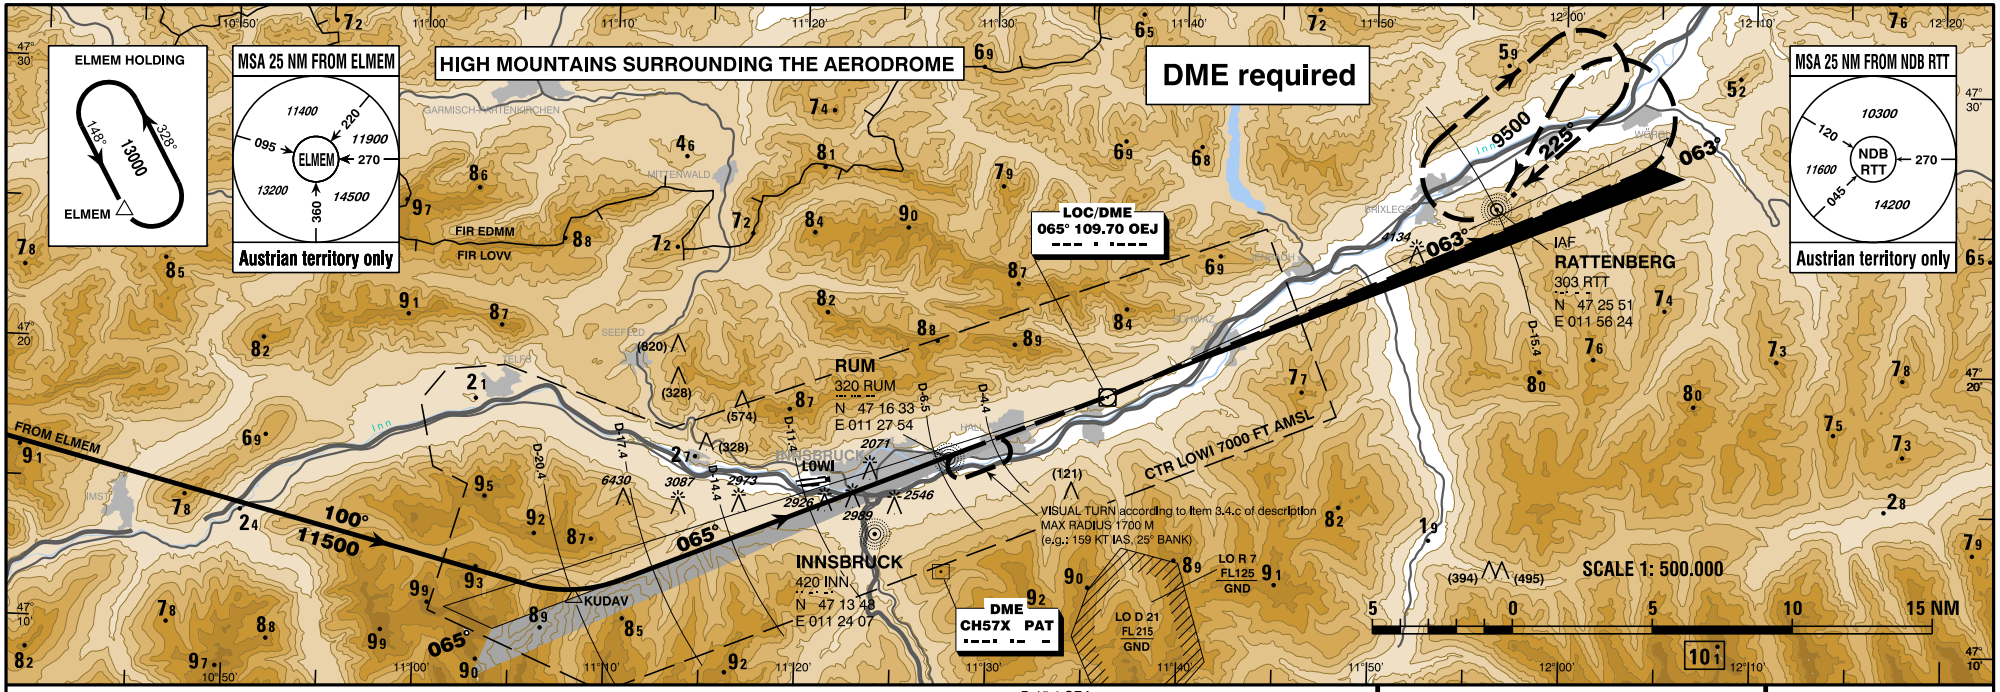

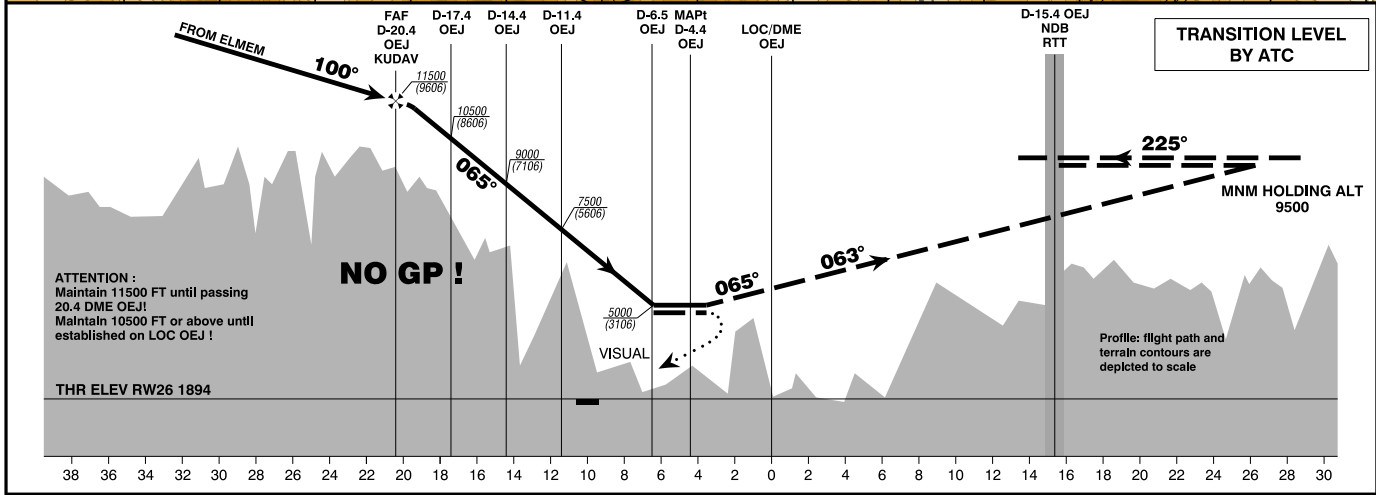

TRANSITION LEVEL BY ATC

Missed Approach:
Climb on LOC course 065°/063° to 9500 FT AMSL, TURN LEFT and enter the holding RTT. In the vicinity of the LOC station use QDR of locator "RUM" as additional guidance.

CONTOUR LEGEND

11000 FT
10000 FT
9000 FT
8000 FT
7000 FT
6000 FT
5000 FT
4000 FT
3000 FT
2000 FT
1000 FT
MSL

BEARINGS, TRACKS AND RADIALS ARE MAGNETIC

ALTITUDES, ELEVATIONS AND HEIGHTS ARE IN FEET

DISTANCES ARE IN NM

MDA (MDH) in FT	MA CLIMB GRADIENT	REQUIRED FLIGHT VISIBILITY IN THE AREA OF VISUAL OPERATIONS				CEILING REQUIRED AT THE MDA
		A	B	C	D	
5000 (3110)	2.5% UP TO 7000 FT MSL 2% ABOVE 7000 FT MSL	3 KM		5 KM		

VISUAL SEGMENT AND CEILING PROCEDURE SEE LOWI AD 2 MAP 14-1

D-20.4 OEJ TO D-6.5 OEJ - DISTANCE 13.9 NM						
GS (KT)	80	100	120	140	160	180
MIN : SEC	10:26	8:20	6:57	5:57	5:13	4:38