


INSTRUMENT APPROACH CHART - ICAO

VAR 4° E


AD ELEV 980 FT
THR 08 ELEV 978 FT
HGT RELATED TO THR ELEV
CIRCLING HGT RELATED TO AD ELEV

RADAR 129.625
TOWER 125.685
ATIS 118.800
128.130

L I N Z
ÖSTERREICH AUSTRIA
ILS or LOC RWY 08

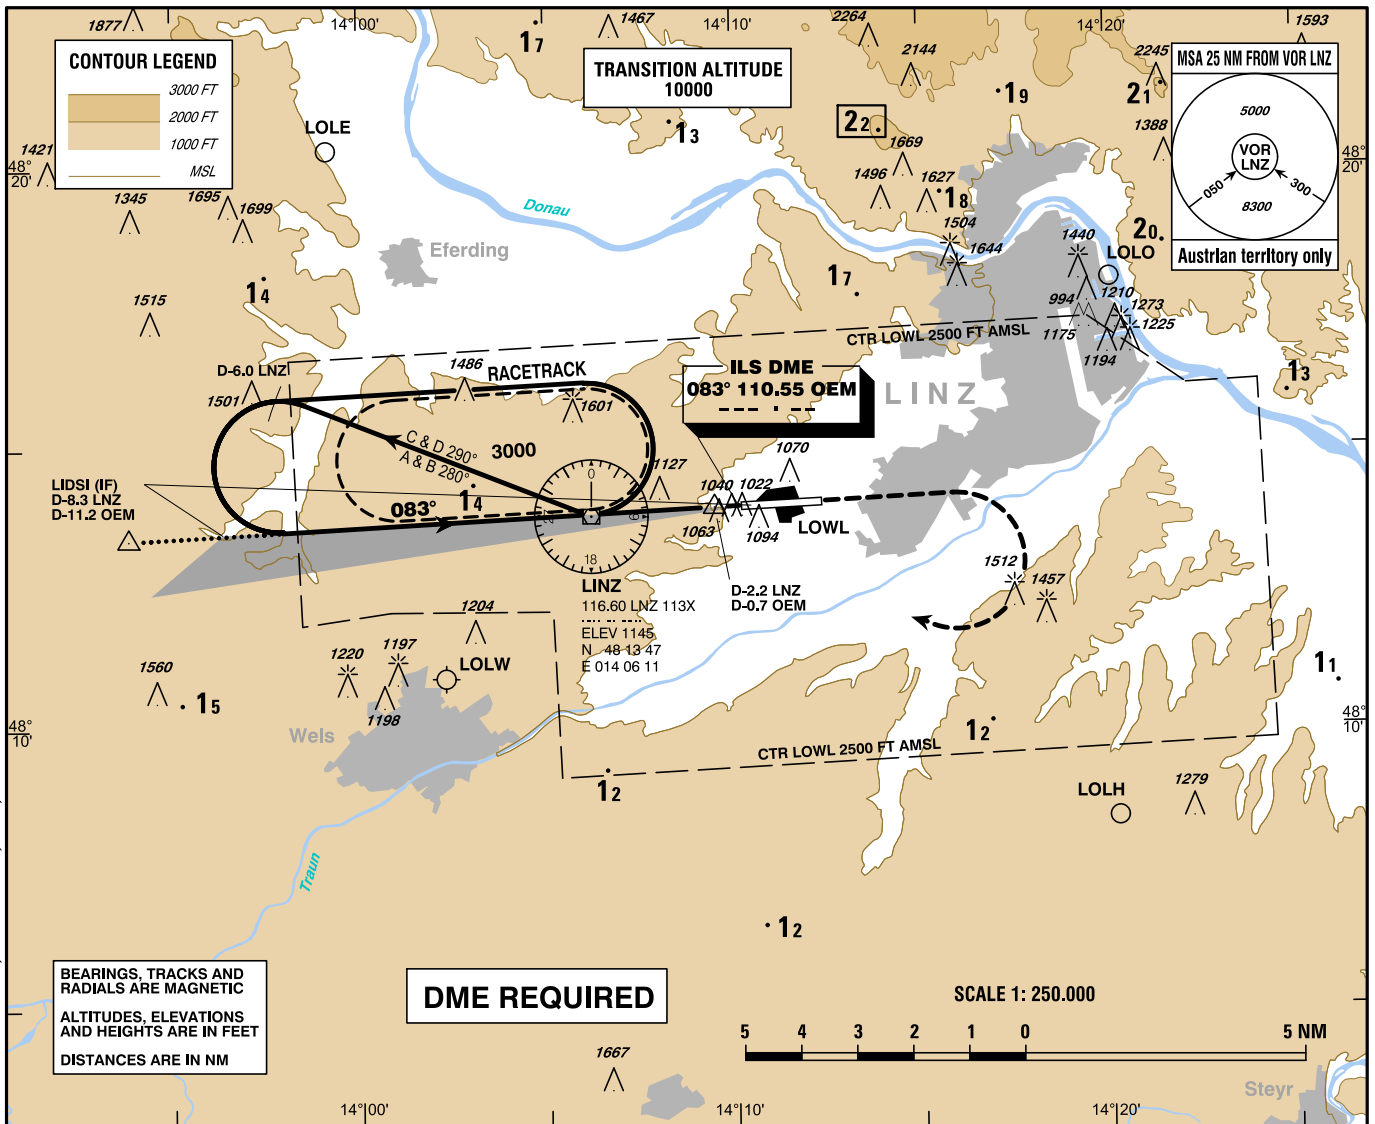

CHANGE: CIRCLING; OBSTACLES; ROD; EDITORIAL

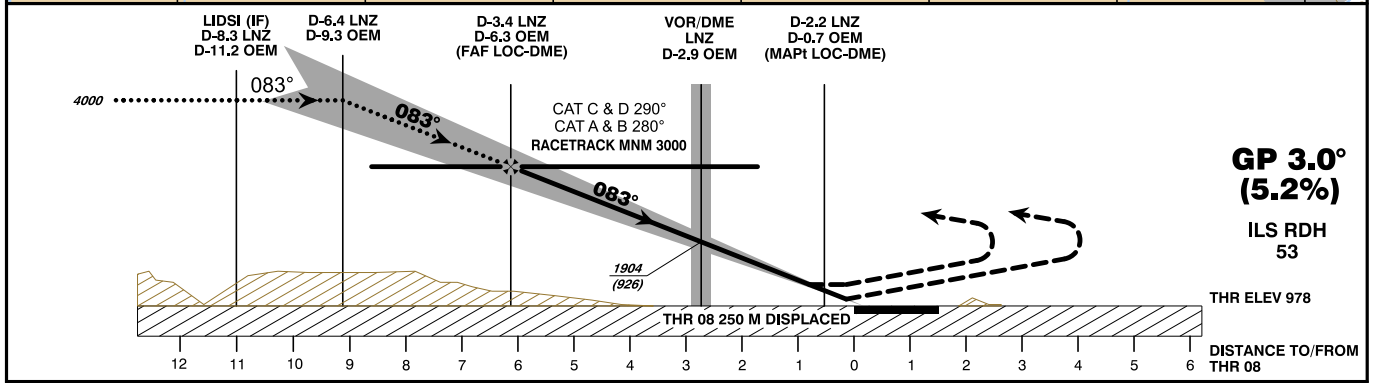

MISSED APPROACH: CLIMB STRAIGHT AHEAD, WHEN PASSING 3000 FT AMSL TURN RIGHT TO VOR/DME LNZ; CONTINUE CLIMB TO 4000 FT AMSL AND HOLD.

OCA (OCH) IN FT					D-6.3 OEM to THR 08 - DISTANCE 6.1 NM (Timing not authorized for defining the MAPt)								
STRAIGHT-IN APPROACH	CAT I Press. Altim.	A	B	C	D / D _L	GS (KT)	80	100	120	140	160	180	
		LOC-DME	1124 (146)	1136 (158)	1144 (166)								1155 (177)
CIRCLING		1480 (500)	1550 (570)	1910 (930)		Rate of descent (5.2%)	FT / MIN	420	530	640	740	850	960
CIRCLING NOT AUTHORIZED NORTH OF THE AD													
					DME OEM	6	5	4	3	2			
					DIST THR	5.8	4.8	3.8	2.8	1.8			
					ALT (HEIGHT)	2920 (1942)	2590 (1612)	2270 (1292)	1940 (962)	1620 (642)			